

# aquaboost

## iBoost F200

Ideally suited for high occupancy properties with multiple bathrooms and water using appliances. The iBoost F200 provides an unrestricted supply of up to 100 litres per minute and up to 4.5 bar pressure, with a typical performance of 60 litres per minute at 3.0 bar pressure.

This reliable compact system will sit neatly within any standard 600 mm kitchen larder cupboard or alongside other household white goods.

### iBoost F200-CAT 5

The iBoost F200-CAT 5 option features a weir overflow making it suitable for use in applications where the risk of backflow contamination from Category 5 fluids exists.




## Features

### iBoost F200

- 4.5 bar pressure
- Up to 100 l/min
- High capacity fill valve
- Continuous 20 l/min minimum\*
- Quiet operation
- Automatic switching
- Dry run protection
- Continuously rated
- CAT 5 option


## Application

- Boosting water pressure and flow in larger domestic and light commercial applications
- Boosting water pressure and flow in laboratories, stables, kennels, waste bin stores and wash down stations (CAT 5 model)

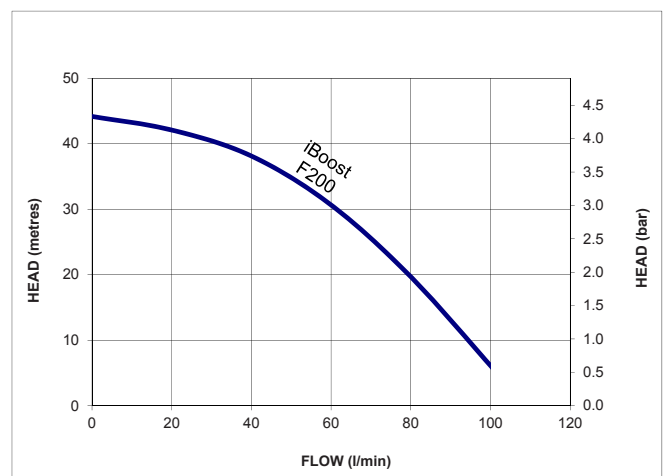

# aquaboost

Pump Model		iBoost F200 46668	iBoost F200-CAT 5 46677
General	Guarantee	3 years	
	WRAS approval	1705346	N/A
Features	Fluid risk compatibility	CAT 3, CAT 4	CAT 5
	Air gap	Type AF	Type AB
	Pump type	Centrifugal	
	Break tank water capacity (usable)	200 litres	
	Fill rate	20 l/min*	
	Pressure vessel	8 litres	
	Dry run protection	✓	✓
	Control interface	Power on / Pump on / Dry run indicators Pump reset button	
Materials	Break tank	Polyethylene	
	Pump body	Brass / stainless steel	
	Impeller	Stainless steel	
Performance	Maximum head (closed valve)	4.5 bar (450 kPa)	
	Maximum flow	100 l/min	
	Maximum inlet pressure (tank fill valve)	7 bar (700 kPa)	
	Maximum static outlet head	15 metres	
	Min / Max ambient air temperature	4 °C - 30 °C	
Connections	Inlet	G ½ male	
	Outlet	G ¾ male	
	Overflow	G 1¼ Compression fitting (dia. 35 mm OD pipe)	G ¾ Compression fitting (dia. 21.5 mm OD pipe)
Flexible hoses	Connections (outlet only)	G ¾ female x 22 mm push-in x 220 mm long	
Motor	Type	Induction, auto-reset thermal trip	
	Duty rating	Continuous (S1)	
Electrical	Power supply / phase / frequency	230 V a.c. / 1 / 50 Hz	
	Current (full load)	5.5 Amps	
	Power consumption	1260 Watts	
	Fuse rating	10 Amps	
	Power cable (pre-wired)	3.0 metres	
Physical	Depth	529 mm	
	Width	536 mm	
	Height (excluding hoses)	1504 mm	
	Dry weight (including fittings)	55 Kg	
	Filled weight (maximum)	255 Kg	

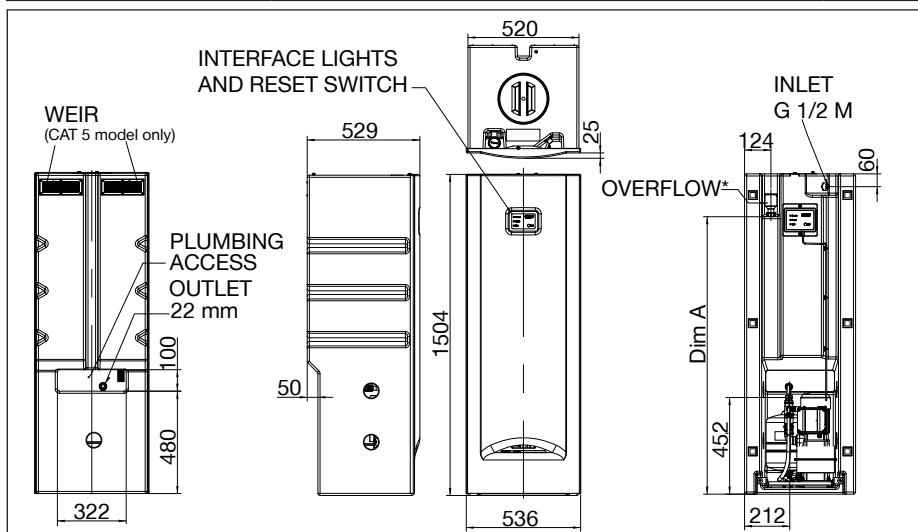

\*Assumes 1 bar inlet pressure.

Pump Description	Dim. 'A'	Overflow*
iBoost F200	1282 mm	G 1¼
iBoost F200-CAT 5	1299 mm	G ¾

Stuart Turner Limited reserves the right to amend specifications without notice.

## **Check out our full range of Showers**

Electric Showers

Digital Showers

Mixer Showers

Power Showers

Smart Showers

Shower Towers

## **From Top Shower Brands**

Mira Showers

Aqualisa Showers

Triton Showers

Gainsborough Showers

## **Shower Pumps can upgrade your showering experience even more**

Stuart Turner Shower Pumps

Salamander Shower Pumps

Grundfos Shower Pumps

**plumbworld**  
**Big brands, small prices.**